



User Manual

2-bay USB 3.0 Offline Hard Drive Cloning
Docking Station 6228US3-C


Product introduction

ORICO 6228US3-C is a tool-free docking station for 2.5/3.5 inch SATA hard drives. It shortens the tedious hard drive installation procedure and makes data transfer and file backup quick and convenient.

Illustration

2.5/3.5 inch hard drive slot (original drive) 2.5/3.5

inch hard drive slot (target drive) Self-cloning indicator

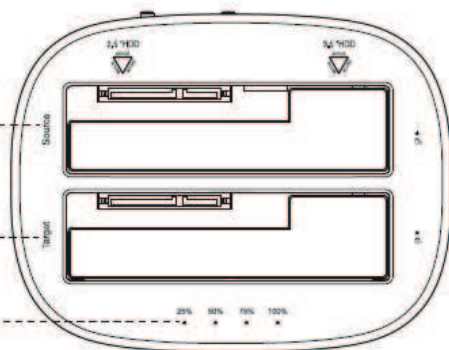


CLONE/PC

USB3.0 Port

DC Port

START

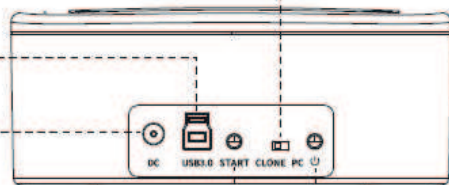

Power switch

Package Contents

Please check if the product and accessories are in the package. If there are any problems, please contact the distributor or ORICO customer service.

Product.....	1PC
USB3.0 data transmission cable.....	1PC
Power cord.....	1PC
Power adapter.....	1PC
User manual.....	1PC
Service card.....	1PC


Tips

Due to different production batches, the product packaging, appearance or accessories may change and be inconsistent with the drawings, appearance and instructions contained in this manual. We apologize for any inconvenience.


Instructions

Installation Instructions


1. Insert the hard drive into the hard drive slot (pay attention to the interface).

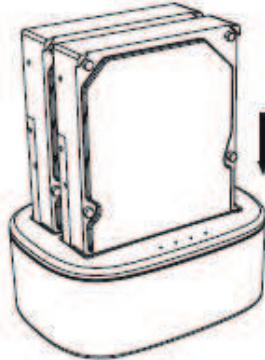

2. Connect the power supply.

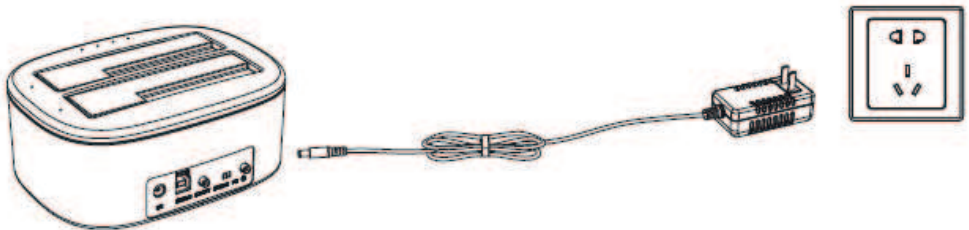

3. Connect the hard drive to the computer using a USB cable.

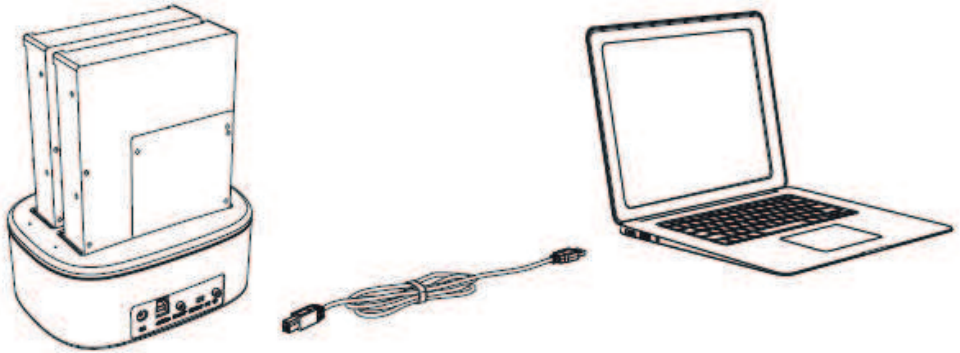


Cloning

In addition to the ability to simultaneously operate two 2.5" or 3.5" SATA hard drives, this model has an additional offline copying function, which is usually called hard drive cloning.


Backup files from the source drive to the destination drive without connecting to a computer. You can set the cloning switch to the "CLONE" position and start cloning the hard drive with the "START" switch. cloning the hard drive using the "START" switch.

How to start


1. Connect to the power supply.

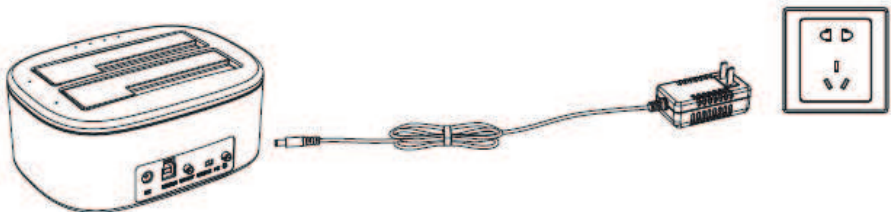

2. Insert the hard drive. The source slot contains the original drive with the original materials, and the target slot contains the target drive where the materials will be saved.




3. Everything is ready, set the cloning switch to the "CLONE" position, press the power switch, and the device will start a self-test with two beeps, press "START", the device will beep once, indicating that it has started cloning.

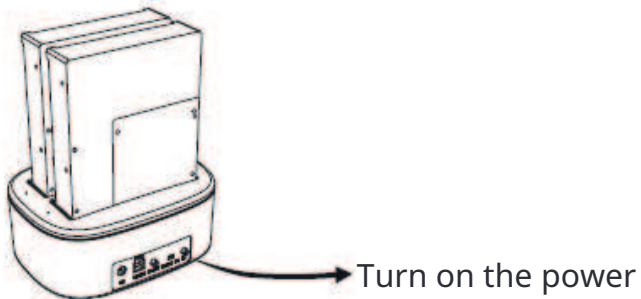

4. During duplication, the process indicators inform about the number of duplicated files.

Note: The cloning indicators are 25%, 50%, 75%, 100% respectively. They will be turned on one after another during duplication.

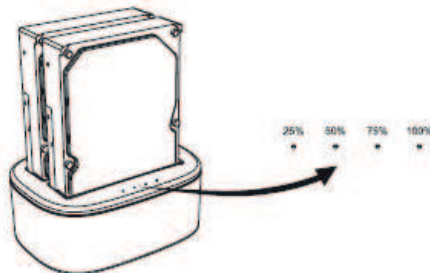

5. After cloning is complete, all four indicators will light up, three beeps will sound, and the hard drive will stop working.



Note: XP system does not recognize drives larger than 2 TB, if the drive is larger than 2 TB, you need to upgrade the system to WIN7 or later to identify it. There are two hard drive partition formats: MBR and GPT. MBR supports up to 2 TB and supports up to 4 partitions. GPT supports up to 256 TB and supports up to 7 primary partitions. Choose the hard drive partition format according to your needs.

Removing devices

Caution: When removing devices, you must first stop reading data, otherwise data will be deleted or lost.

Troubleshooting

If the hard drive does not install correctly, try the following steps to troubleshoot the problem.

1. Check if the USB device is properly connected to the computer . If you are using the front interface of the case, try using the rear interface of the case.
2. Check if the device can operate after inserting only one hard drive.
3. Make sure the cable and power supply are properly connected.
4. Check if the power indicator is lit after connecting the device.
5. Make sure the hard drive is formatted. If not, right-click My Computer and select Manage - Disk Management. You will see all hard drives connected to the computer and check if the drive has been formatted. If not, format the hard drive using the hard drive formatting instructions in Windows.
6. If possible, connect the device through a different USB interface or

connect it to another computer to check if the problem concerns the product itself.

7. Connect the device to a different 12V power supply to check if the device is working properly.

In case of any problems, please contact our customer service department and send specific information about the hard drive and computer system to the customer service department's mailbox in the form of a screenshot. Our staff will contact you as soon as possible.

INNPRO Robert Błędowski sp. z o.o.
ul. Rudzka 65c
44-200 Rybnik, Poland
tel. +48 533 234 303
hurt@innpro.pl



Precautions

1. Before charging, make sure that the device contacts are clean.
2. Never leave the device unattended during use and charging.
3. Make sure that in an emergency you can quickly disconnect the device from the power source.
4. Never expose the device to high temperatures.
5. Charge the device in a dry and well-ventilated place away from flammable materials , keep a free space of at least 1 m from other objects.
6. Never cover the device while charging.
7. Never use a power supply, charging station, cables, etc. without manufacturer's recommendation and approval.
8. Take care of your property, the device is equipped with cells that are difficult to extinguish, equip yourself with a fire blanket.

Environmental Protection



Used electronic equipment marked in accordance with the European Union directive, cannot be placed together with other municipal waste. It is subject to separate collection and recycling at designated points. By ensuring its proper disposal, you prevent potential negative consequences for the environment and human health. The used equipment collection system complies with locally applicable environmental protection regulations regarding waste disposal. Detailed information on this subject can be obtained from the city office, waste disposal plant or the store where the product was purchased.

CE The product meets the requirements of the so-called New Approach Directives of the European Union (EU), concerning issues related to user safety, health protection and environmental protection, defining the hazards that should be detected and eliminated.

This document is a translation of the original user manual, created by the manufacturer.

The product should be regularly maintained (cleaned) independently or by specialized service points at the user's expense and within the user's scope. If the user manual does not provide information about necessary cyclical or service maintenance actions, it is necessary to regularly, at least once a week, assess the difference in the physical condition of the product from a physically new product. If any difference is detected or found, it is necessary to take immediate maintenance (cleaning) or service actions. Lack of proper maintenance (cleaning) and reaction upon detection of a difference in condition may lead to permanent damage to the product. The warranty provider is not responsible for damage resulting from neglect.

Detailed information about the distributor / manufacturer's warranty conditions is available on the website
<https://serwis.innpro.pl/gwarancja>